

# QUIKJOINT



Same Day as Application



2 years later

**“Seal it the same day you patch it.”**

Time is money! What is the cost to send a crew out again, set up barricades? Start up an expensive crack sealing machine, and seal a few hundred joints?

## **QuikJoint is the Answer!**

QuikJoint is a pavement joint banding sealant system specifically designed to Quickly overlay a joint the same day the patches are installed after clean up. This Improved elastic rubberized non tracking asphaltic membrane tape sets up quickly, Minimal heat required, simple to install and you're done. Take the barricades down and move to the next project, no return visits necessary!

### **ADVANTAGES**

Permanent Bond • Water Proof Joint • Set up on cooling (10 min)  
No Mess • Non-Tracking • Apply Quik Joint after clean up • Long Lasting  
Easy to Install • Economical • Can be used on Concrete or Asphalt

#### **Distributor**

**BREWER COTE** *of Arizona*

**The Pavement Maintenance Specialist**

**5226 West Missouri Avenue Glendale Arizona 85301**

# QuikJoint

## CHARACTERISTICS

### Composition

QuikJoint shall consist of a bottom release paper liner, a middle layer comprised of .93 mil thickness of non-tracking, non-shrinking rubberized asphaltic membrane and a top layer of a 3-mil clear plastic liner. Applicable to section of ASTM D3405.

### Method of Application

Pavement must be clean, dry, free of dust and other foreign materials. Pavement temperature should be 40° F. Position product over pavement joint and remove bottom paper layer, cold tack material to surface, trim to proper length and apply heat. The heating source shall be continually moved across the materials until top plastic membrane is fired off and liquefaction occurs. Proper clothing and safety procedures shall be followed at all times.

<b>Color</b> Black	<b>Length</b> 50 ft / roll	<b>Thickness</b> 3.66"	<b>Drying-time</b> 10 Min	<b>Weight</b> .82 lbs. psf
-----------------------	-------------------------------	---------------------------	------------------------------	-------------------------------

<b>Roll Dimension</b> 9" nominal on 3" diameter core	<b>Widths- Standard</b> Uniform 2", 4", 8" Wide, designed to maintain its uniformity following placement and heating	<b>Packaging</b> Rolls (50') or Pails Rolls per Pail 2"/ 8 rolls or 4"/ 4 rolls 8"/ 2 rolls
--	---	---

### Clean up

Properly dispose of bottom layer of release paper. Package & store unused portion of roll in original container in areas not exceeding 120° F.

# QuikSeam

The most effective way of protecting pavement joints against water infiltration

## Peel & Stick

- Water Proof
- Full Depth Seal
- Increases Density
- All In One Joint Sealer
- Utility Cuts
- Highways
- Airports
- New Construction
- Overlays



## Seam and Water Infiltration Sealants



*Peel and Stick on Vertical and Horizontal Pavement Surfaces*



Full Depth Patch



Completely seals edges and finish surface on longitudinal joints



Installs by removing release liner, self-adhering to vertical pavement edge or surface cracks and joints prior to placement of hot mix

Product #	Description	Application
QJP95000	9 inch wide x 50 feet long QuikSeam, 37.5 sq.ft.	Vertical Joint
PPSA33263	12 inch wide x 50 feet long PavePrep, 50 sq.ft.	Underlayment
PPSA33265	18 inch wide x 50 feet long PavePrep, 75 sq.ft.	Underlayment
PPSA33270	24 inch wide x 50 feet long PavePrep, 100 sq.ft.	Underlayment
GT33215	18 inch wide x 50 feet long GeoTac, 75 sq.ft.	Waterproof Membrane



# QuikHold

Bituminous Pads for Traffic Control Devices, Reflectors, Speed Bumps and Temporary Signage

## Peel & Stick Pads

Adhesive Rubberized Asphalt  
Apply Heat  
No Mess  
Easy to Install  
Concrete or Blacktop



Anchor bituminous pads when concrete deck cannot be drilled

Install by peeling and sticking pads on pavement where traffic control sign, speed bump, or reflector is to be located; heat and bond.

Product #	Description	Qty
QH4000	QuikHold Pads 4 in. x 4 in. squares	100
QH9000	QuikHold Pads 8 in. x 8 in. squares	25
QH1200	QuikHold Pads 12 in. x 12 in. squares	25



# QuikFill

Repair Cracks, Fatigued Surfaces, Low Spots and Pot Holes in pavement

## Coated Granules

Alligator Areas  
Fatigued Surfaces  
Cracks & Joints  
Depressions  
Pot Holes


Fill cracks and distressed pavement work area

Install QuikFill and over seal with QuikSeam.



Fill and brush material into cracks, fatigued, alligator and low spots; heat then over seal with Quikjoint or QuikSeam.

Product #	Description	Qty
QS9010	QuikSeam Roll 9 inch wide x 10 feet long (7.50 sq.ft.)	2
QF6500	QuikFill 6 gallon plastic pail 50 lb filler	1

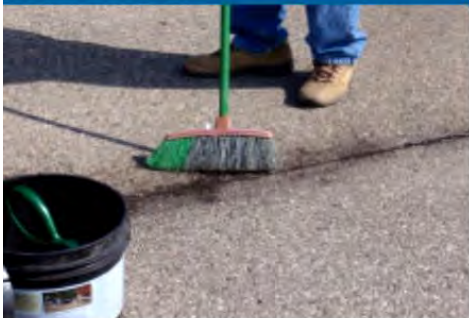

Distributed By

**BREWER COTE OF ARIZONA INC® THE PAVEMENT MAINTENANCE SPECIALISTS**  
5226 W. MISSOURI AVENUE, GLENDALE ARIZONA 85301

www.brewercoteaz.com • tel. 623-931-3728 • toll 888-931-3728 • fax 623-842-0714 • sales@brewercoteaz.com